

Superlux[®]

CMH8AMKII
LARGE DIAPHRAGM TRUE CONDENSER
MICROPHONE SET

Instruction Manual
使用手冊

p.1
p.9

CMH8AMKII

LARGE DIAPHRAGM TRUE CONDENSER MICROPHONE SET

Description

The CMH8AMKII is a studio-grade large diaphragm condenser microphone, featuring a 1-inch diameter, 3µm thickness gold-plated diaphragm. It captures delicate sound details, especially excelling in low and mid-frequency performance, resulting in a warm and rich tone that is particularly suitable for recording vocals, singing, and instruments. This microphone's preamp circuit has been optimized to significantly reduce self noise, ensuring clearer and purer recordings.


Even when faced with very quiet or faint sound sources, it delivers clean and interference-free recording results. The CMH8AMKII has a wide pickup range, allowing for a natural soundstage, making it especially suitable for recording sources that require a sense of space. It not only excels in vocal recordings but is also well-suited for capturing guitars, drums, pianos, and other instruments, widely used in professional studios. Its excellent dynamic range enables this large diaphragm

microphone to authentically present the depth and dimension of sound, adding layers and richness to recorded music or audio materials.

Features

- **Superior Sound Quality:** 1-inch $3\mu\text{m}$ gold-plated diaphragm, accurately captures sound details, providing rich low and mid frequencies, ideal for vocals and instrument recording.
- **Low Noise Design:** Optimized preamp circuit significantly reduces background noise, ensuring clear, interference-free recordings.
- **Natural Soundstage:** Wide pickup range, delivering a natural soundstage suitable for various sources.
- **Excellent Dynamic Range:** Effectively presents sound depth and dimension, enhancing the layers in recordings.

Frequency Response

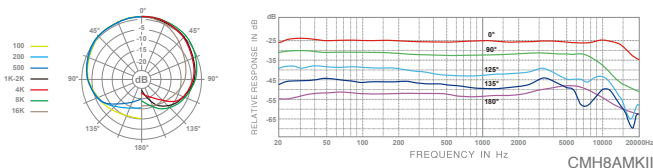


Specifications


*Note: Specifications are subject to change.

Type	True condenser, Ø1" (Ø25.4 mm)
Polar pattern	Cardioid
Frequency response	30 - 20,000 Hz
Sensitivity	-30 dBV/Pa (31.2 mV)
Rated impedance	200 Ω
Minimum load impedance	1000 Ω
S/N Ratio	89 dB
Equivalent Noise	5 dB A-Weighted
MAX. SPL	138 dB
Dynamic range	133 dB
Power supply	48 V DC 2.7 mA
Finish	Black / Silver
Connector	XLR3M
Dimensions	Ø54 × 200 mm (Ø2.13" × 7.87")
Net weight	550 g (19.4 oz)


Dimensions

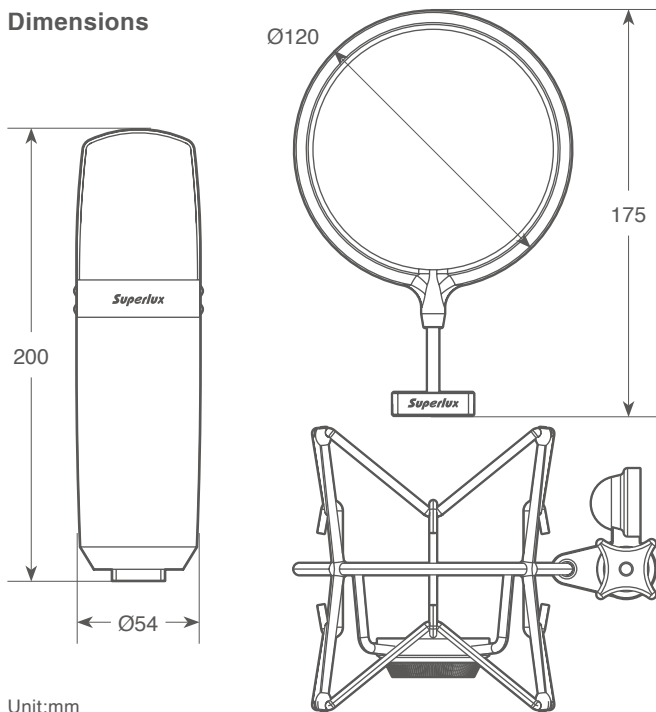

Unit:mm

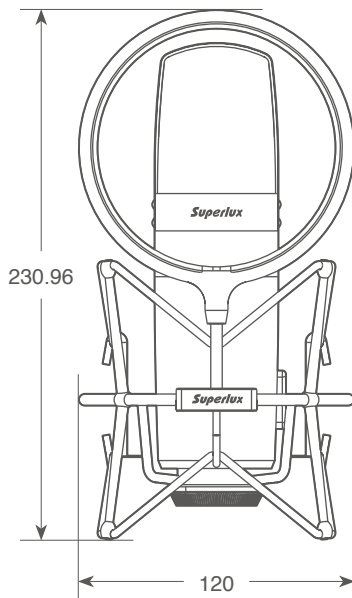

Unit:mm

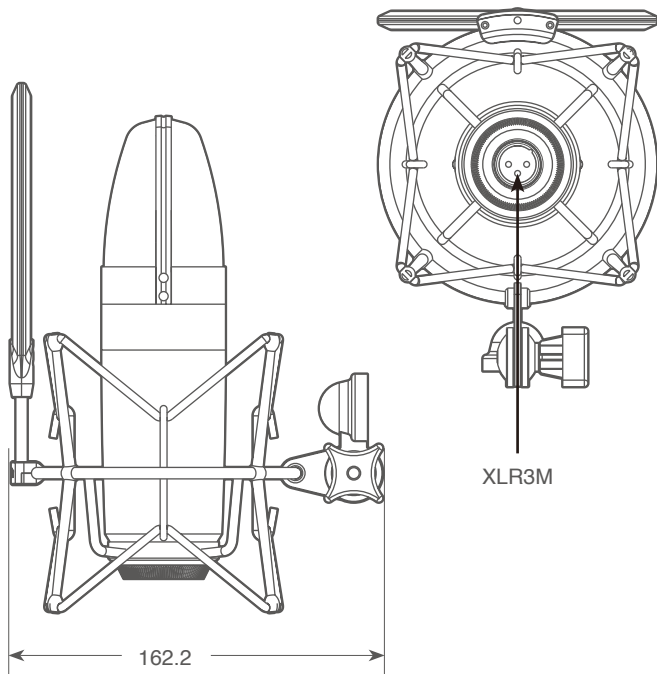

Included

Superlux®



HM7 Elastic
Shock Mount



5M
Straight Cable



Microphone
Pop Filter



Carrying
Pouch

Contact

International Sales & Marketing Office

GOANG-FANN CO., LTD

TEL: +886-2-2693-1323

FAX: +886-2-2694-8990

Email: sales@superlux.com.tw

China Sales & Marketing Office

SUPERLUX ENTERPRISE

DEVELOPMENT (LIANYUNGANG)
CO.,LTD.

Email: sales@superlux.com.tw

www.superlux.com.tw